


Intelligent Measuring Technology
when Color Quality counts



Spectrophotometers
for professional digital printing
on a wide variety of materials

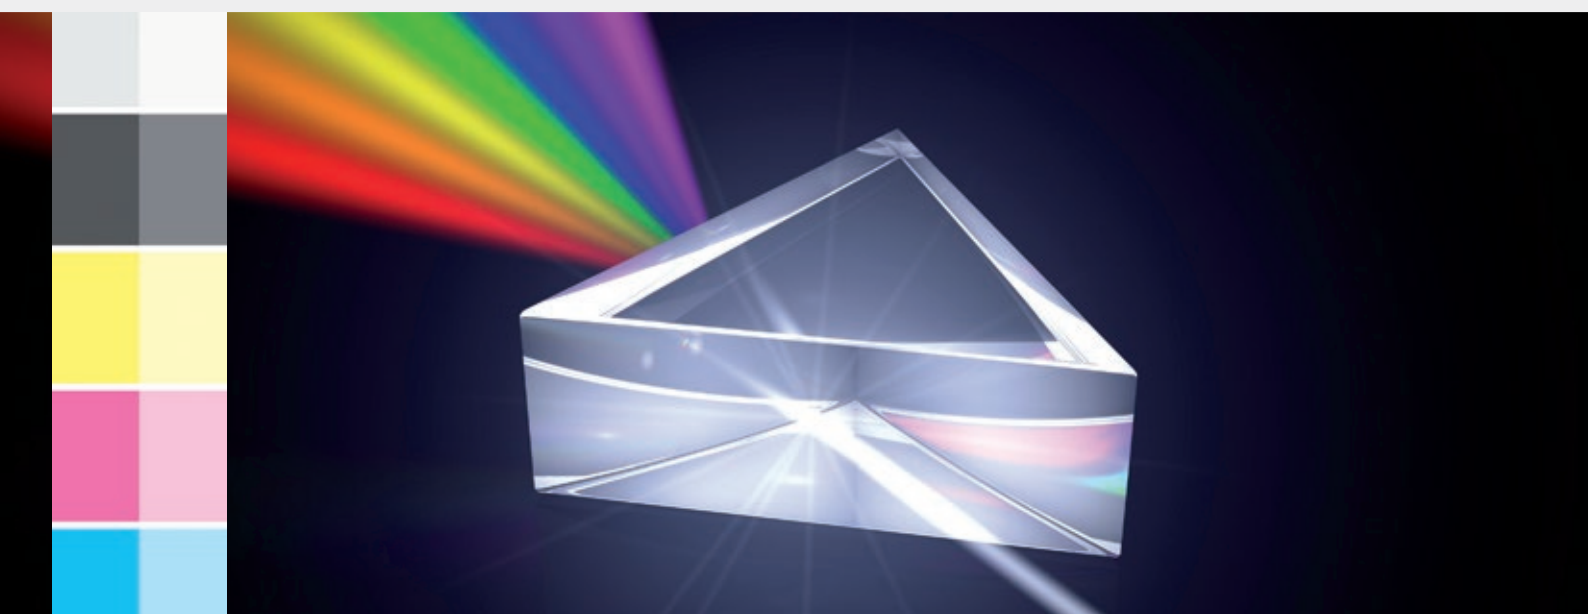

Barbieri DOC (Digital Output Control)

Easy Process Control

for Digital Large Format Printing



Barbieri SpectroPad DOC with built in process control analysis

Barbieri DOC (Digital Output Control) is the solution for process control and image quality evaluation in digital printing. It compares the actual print with a preset reference and gives immediate feedback if color values are within tolerance – without a computer, directly at the large format printer.

Do you know if your printing conditions have changed? Do you know if you are able to reproduce the same colors again? Media, ink, temperature, humidity, workflow, printer interventions; there are many factors which influence the color appearance in digital large format printing.

For this very reason, BARBIERI introduces Barbieri DOC (Digital Output Control). This process control solution checks the stability of the digital printing process and is tailored to the needs of large format, flatbed and industrial printing. It is easy to use and straightforward thinking: the actual state of a printer/media combination is set as a reference and all following prints are compared to this. For the wide range of media used in digital large format printing, Barbieri provides presets and templates tailored to each special media characteristic. The comparison of the actual state to the reference reveals whether the printing process is stable. This enables the printer operator to decide on the spot if printing should continue or if an adjustment to the printing process is required.

The DOC process control solution by Barbieri consists of the innovative SpectroPad and built in DOC software. Using SpectroPad DOC, the stability of the printing process can be instantly verified and can determine if an actual print is within specifications directly at the printer. Being wireless (battery operated and data transmission by WiFi) the control strip is measured directly on the printer, the measuring device calculates the DOC report internally and instantly displays results on the touch screen. If required, the data can be sent wirelessly to a computer to print and store report data.

In addition to process control, Barbieri provides tools to evaluate image quality in digital printing. For instance, the homogeneity of a print can be evaluated according to the Fogra M-Score.

Barbieri DOC also supports calculations according to Fogra PSD and IDEAlliance.

Barbieri DOC is available for SpectroPad, Spectro LFP and Spectro Swing.

Spectro **LFP** S.3


Spectro *Swing*

Spectro pad®



Information about

- Gamut
- Ink
- Linearization
- Media
- Color Difference Formula
- Chart, Measurement

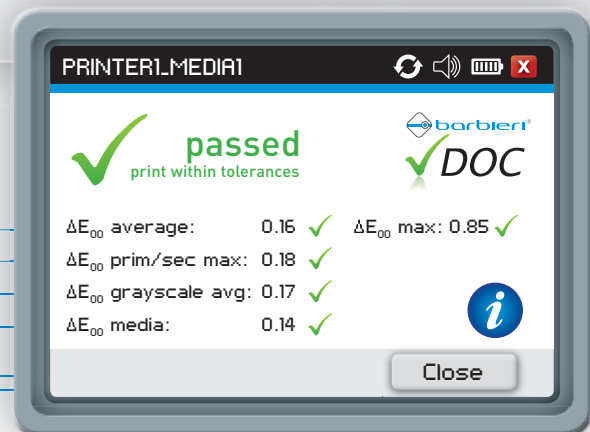

Barbieri DOC report shown on SpectroPad DOC



- aperture diameter 2, 6, 8 mm
- measurements of transmissive and reflective media
- up to 20 mm thick media

Spectro LFP S.3

The Spectro LFP series is the most versatile transmission/reflection spectrophotometer ever. It is specially designed for the automatic measurement of a wide variety of materials in large format, flatbed and industrial printing.

Application fields

- Creation of ICC profiles for digital output devices on a wide variety of materials (reflective and transmissive)
- Linearization of digital output devices
- Single measurements of spot colors with subsequent check for color true printing.

Main features

- For transparent and reflective media
- Measurement aperture switchable between 2, 6 and 8 mm diameter
- Also for heavy and thick materials (max. media thickness 20 mm)
- Supported by most RIP-software (Refer to: www.barbierielectronic.com)
- Some examples of materials which can entirely be automatically measured: textiles, glass, backlit film, papers, vinyl, cardboards, plastic plates, gypsum plates, wood, stone and ceramic plates.


- ISO 13655-2009 measurement conditions: M0, M2 (UVCut) and M3 (Pol)
- Includes free measurement software Barbieri Gateway for Mac and PC
- Geometry:
 - reflection 45°/0°
 - transmission d/0°

System requirements

- Microsoft Windows XP or later (32 and 64 bit)
- Mac OS X 10.5 or later (Intel)

	Spectro LFP
Reflective measurements	<input checked="" type="checkbox"/>
Transmissive measurements	<input checked="" type="checkbox"/>
2 mm measurement aperture	<input checked="" type="checkbox"/>
6 mm measurement aperture	<input checked="" type="checkbox"/>
8 mm measurement aperture	<input checked="" type="checkbox"/>
Automatic measurements	<input checked="" type="checkbox"/>
Up to 2 mm thick media	<input checked="" type="checkbox"/>
Up to 20 mm thick media	<input checked="" type="checkbox"/>

Accessories Spectro LFP S.3





- buttonless operation
- flexible media up to 1 mm thickness
- measurements of transmissive and reflective media

Spectro Swing

The ability for the Spectro Swing to measure transparent materials on a wide variety of flexible media makes it a special and unique measurement device. It is ideal for production environments as it is tailored to the needs of all aqueous, solvent and UV roll-to-roll printers.

Application fields

- Creation of ICC profiles for digital output devices on a wide variety of materials (reflective and transmissive)
- Linearization of digital output devices
- Single measurements of spot colors with subsequent check for color true printing

Target markets

- Inkjet (aqueous, solvent) printing
- Digital photo printing
- Packaging

Main features

- For transparent and reflective media
- Measurement aperture 2 mm diameter
- Easy to use thanks to "buttonless operation"
- Able to measure targets with up to 3000 patches
- Suitable for a wide variety of flexible media up to 1 mm thickness (paper, banner, canvas, canvas cover for trucks, backlit, etc.)


- Supported by most RIP-software (Refer to: www.barbierielectronic.com)
- ISO 13655-2009 measurement conditions: M0, M2 (UVCut)
- Includes free measurement software Barbieri Gateway for Mac and PC
- Geometry:
 - reflection 45°/0°
 - transmission d/0°

System requirements

- Microsoft Windows XP or later (32 and 64 bit)
- Mac OS X 10.5 or later (Intel)

	Spectro Swing
Reflective measurements	<input checked="" type="radio"/>
Transmissive measurements	<input checked="" type="radio"/>
2 mm measuring aperture	<input checked="" type="radio"/>
Automatic measurements	<input checked="" type="radio"/>
Up to 1 mm thick media	<input checked="" type="radio"/>

Accessories Spectro Swing



- Barbieri qb-technology inside
- cordless / battery operated
- touch display



Spectro pad[®]

SpectroPad Series 2 is a revolutionary color measuring and process control device. This portable, professional spectrophotometer measures a wide variety of different reflective media used in professional digital printing (including large and wide format). Thanks to its independence from a computer, it can be used also directly on the printer. Its integrated touch display enables interaction with the device and provides instant measurement results.

Application fields

- Process and quality control (SpectroPad DOC)
- Measurement of linearization, profiling and custom charts on a wide variety of materials
- Single measurements of spot colors with subsequent check for color true printing
- Image quality evaluations (homogeneity on the print according to Fogra M-Score)

Target markets

- Professional digital printing

Main features

- Portable, wireless (battery operated, WiFi)
- Measurement aperture 6 mm diameter
- Barbieri qb-technology inside (D50 LED illumination, next generation of highest precision spectral core)

- Humidity and temperature sensor
- Supported by most RIP-software (Refer to: www.barbierielectronic.com)
- ISO 13655-2009 measurement condition: M1, M0 and M2 (UVCut)
- 1-line manual scanning
- Touch Screen
- Includes free measurement software Barbieri Gateway for Mac and PC
- Geometry: 45°/0°

System requirements


- Microsoft Windows XP or later (32 and 64 bit)
- Mac OS X 10.5 or later (Intel)

	Spectro Pad	Spectro Pad DOC
Reflective measurements	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
6 mm measuring aperture	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Measurement of linearization and profiling charts	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Digital Output Control (DOC)	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Accessories Spectro pad[®]



Intelligent Measuring Technology when Color Quality counts

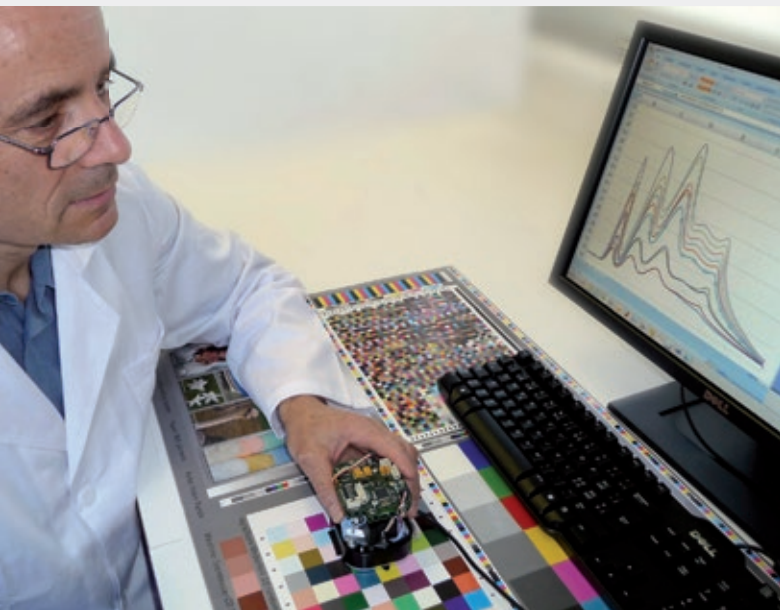

BARBIERI electronic is an internationally operating manufacturer and supplier of intelligent color measurement systems which ensure the highest image quality for professional digital printing. Barbieri specialize in and offer unique solutions for large format, wide format, flatbed and industrial printing.

Barbieri measuring devices have very special features developed right for these markets which include automatic measurements of transparent media, large measuring aperture and process control. Thanks to this measurement, highly accurate results can be obtained on a wide variety of different media.

The international Barbieri technical laboratory continuously discovers new features, characteristics and applications which improve products and help customers to improve their performance. Barbieri share their knowledge and experience in color measuring with the whole market, but especially with professionals who are proud owners of Barbieri devices.

Besides intelligent color measuring technology, Barbieri focus also on professional service. Barbieri aims for their customers to become top performers by delivering the highest level of image quality.

Barbieri is the color measurement market leader for large format, flatbed and industrial printing.